RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

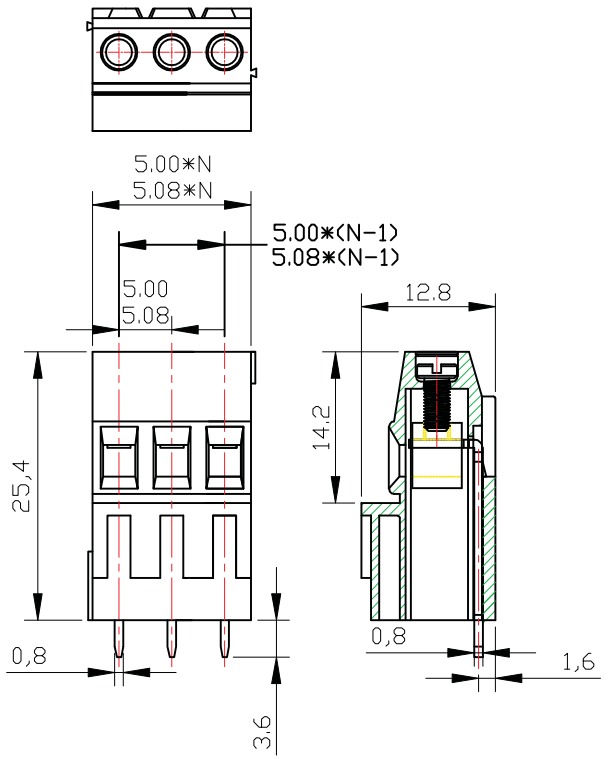

N=No.of contacts

·材质及电镀(Material)
螺丝(Screw):M2.5,钢,镀锌(steel, zinc Plated)
触点(Contact):黄铜,镀镍(Brass,NI plated)
焊针(Pin header):黄铜,镀锡(Brass,Tin plated)
塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)
额定电压(Rated Voltage): 300V
额定电流(Rated Current): 15A
接触电阻(Contact Resistance): 20mΩ
绝缘电阻(Insulation Resistance): 5000MΩ/1000V
耐电压(Withstanding Voltage): AC1500V/1Min
使用线径(Wire Range): 24-12AWG 2.5mm²

·机械性能(Mechanical)
温度范围(Temperature Range): -40℃~ +105℃
焊时温度(MAX Soldering): +250℃, 5秒(5 Seconds)
扭矩(Torque): 0.4Nm(3.6lb.in)
剥线长度(Strip length): 6-7mm

订购方式/HOW TO ORDER

□ □ □ P — □ — □ — X X X 客户需求 Customer Request

型号 Series NO. | 极数 NO.of Pole | 间距 Pitch | 颜色 Color

间距 Pitch	
1	单间距 Single Pitch
2	双间距 Double Pitch

颜色 Color	
1	灰色 Grey
2	蓝色 Blue
3	黑色 Black
4	绿色 Green
5	橙色 Orange
6	红色 Red
7	透明 Transparent
8	黄色 Yellow
9	白色 White

Contact Us
TEL:+86-574-63510149 FAX:+86-574-63516735
E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 DATE	2012.07.10		

慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD

单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST128H—5.0/5.08
角法 VIEW		设计 DESIGN	No.06		
比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST128H—5.0/5.08
版本 VER	A0	核准 APPD		图号 DRAW NO.	ST128H—5.0/5.08